


## 90° Uneq . junction (DS) Grey

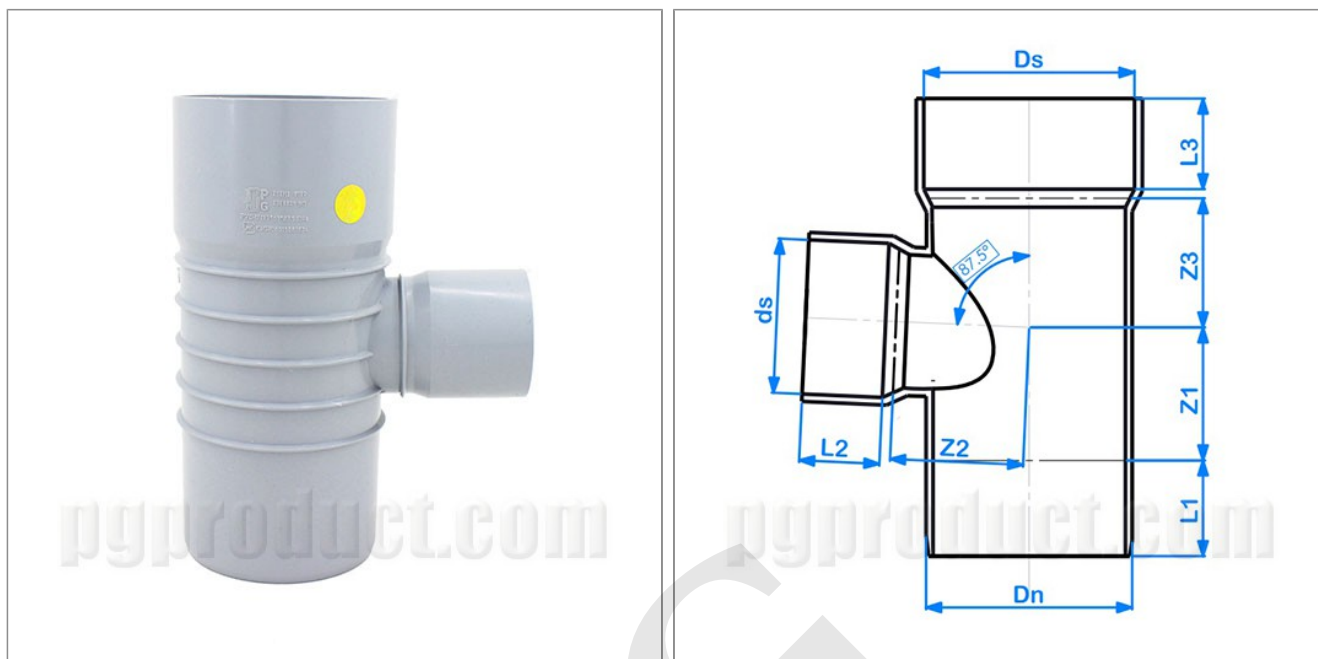

### Standard :EN 1329-1

| Code No . | Thickness (mm) | Nominal Outside Diameter (mm) | Application Area Code | Dn  | Ds     | ds    | L1  | L2 | L3  | Z1 | Z2   | Z3   |
|-----------|----------------|-------------------------------|-----------------------|-----|--------|-------|-----|----|-----|----|------|------|
| PG 2143 F | 3.2            | 90 - 110                      | BD                    | 110 | 110.45 | 90.4  | 75  | 60 | 68  | 60 | 75   | 74   |
| PG 2144 F | 4              | 110 - 160                     | BD                    | 160 | 160.6  | 110.5 | 98  | 68 | 84  | 85 | 95.2 | 97.5 |
| PG 2145 F | 4              | 125 - 160                     | BD                    | 160 | 160.6  | 125.5 | 98  | 72 | 84  | 85 | 95.6 | 97.5 |
| PG 2146 F | 4.9            | 160 - 200                     | BD                    | 200 | 200.7  | 160.6 | 128 | 84 | 108 | 63 | 239  | 262  |