


Push-Fit 45° Uneq . junction (DS) Grey

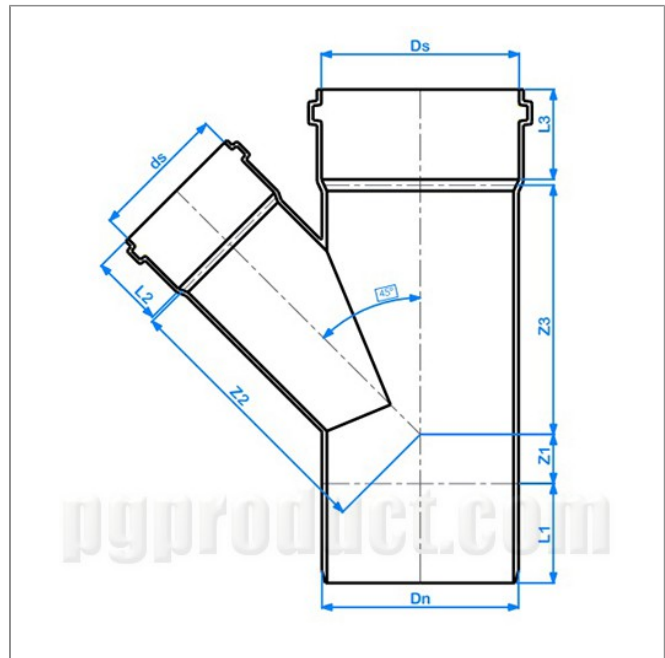

Standard :EN 1329-1

Code No .	Thickness (mm)	Nominal Outside Diameter (mm)	Application Area Code	Dn	Ds	ds	L1	L2	L3	Z1	Z2	Z3
PG 2229 F	3	50 - 75	BD	75	75.4	50.3	62	47	55	18	84	96
PG 2230 F	3	50 - 90	BD	90	90.4	50.3	67	47	60	23	105	117
PG 2221 F	3	63 - 90	BD	90	90.4	63.3	67	51	60	23	111	117
PG 2231 F	3	75 - 90	BD	90	90.4	75.35	67	55	60	23	117	117
PG 2222 F	3.2	63 - 110	BD	110	110.45	63.3	75	51	68	12	120	126
PG 2227 F	3.2	75 - 110	BD	110	110.45	75.4	75	55	68	12	120	126
PG 2223 F	3.2	90 - 110	BD	110	110.45	90.4	75	60	68	32	132	145

Code No .	Thickness (mm)	Nominal Outside Diameter (mm)	Application Area Code	Dn	Ds	ds	L1	L2	L3	Z1	Z2	Z3
PG 2228 F	3.2	90 - 125	BD	125	125.5	90.4	82	60	72	39	136	153
PG 2224 F	3.2	110 - 125	BD	125	125.5	110.45	82	68	72	20	156	154
PG 72225 F	4	110 - 160	BD	160	160.6	110.5	98	68	84	41	180	207.5
PG 2226 F	4	125 - 160	BD	160	160.6	125.5	98	72	84	41	188	207.5
PG 2234 F	4	110 - 200	BD	200	200.78	110.65	128	68	108	63	228.1	262.1