


Push-Fit 45° Uneq . junction (DS) Orange

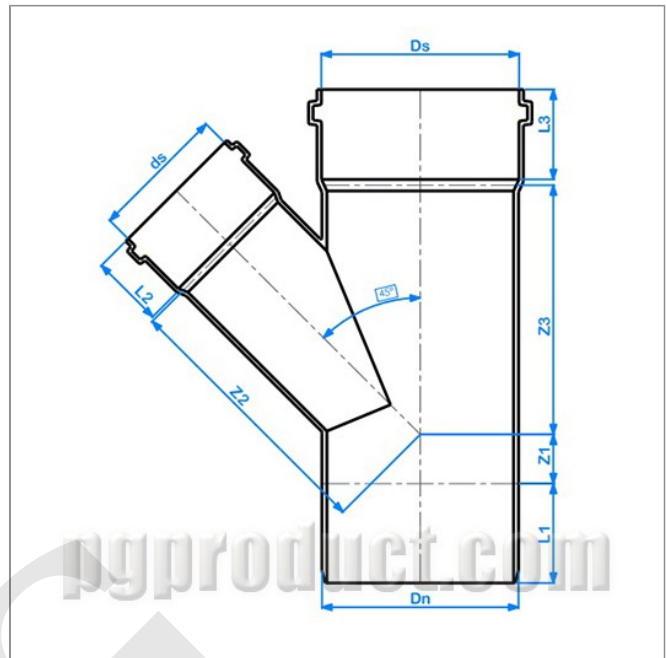

Standard :EN 1401-1

Code No .	Thickness (mm)	Nominal Outside Diameter (mm)	Application Area Code	Dn	Ds	ds	L1	L2	L3	Z1	Z2	Z3
PG 2342 F	3.2	63 - 110	UD	110	110.45	63.3	75	51	68	12	120	126
PG 2347 F	3.2	75	UD	110	110.45	75.4	75	55	68	12	120	126
PG 2343 F	3.2	90 - 110	UD	110	110.45	90.4	75	60	68	32	132	145
PG 2348 F	3.2	90 - 125	UD	125	125.5	90.4	82	60	72	39	136	153
PG 2344 F	3.2	110 - 125	UD	125	125.5	110.45	82	68	72	20	156	154
PG 72345 F	4	110 - 160	UD	160	160.6	110.5	98	68	84	41	180	207.5
PG 2346 F	4	125 - 160	UD	160	160.6	125.5	98	72	84	41	188	207.5