


Push-Fit 45° Uneq . junction (TS) Grey

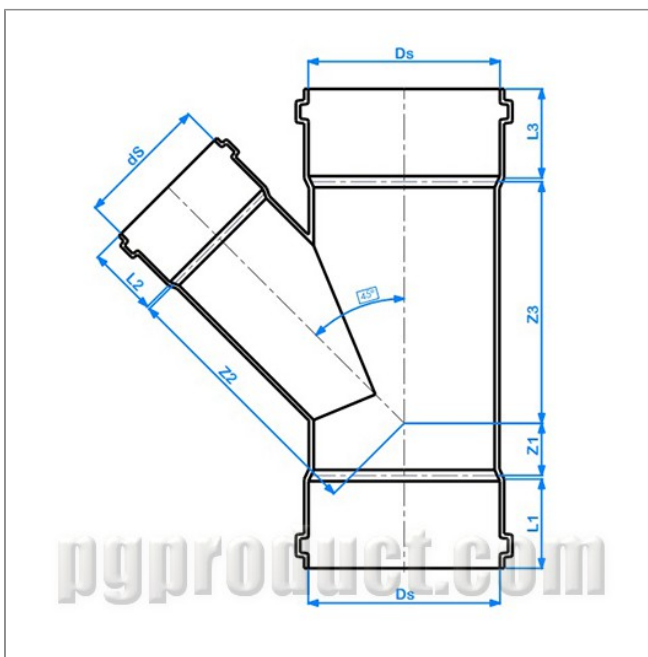

Standard :EN 1329-1

Code No .	Thickness (mm)	Nominal Outside Diameter (mm)	Application Area Code	Ds	ds	L1	L2	L3	Z1	Z2	Z3
PG 2249 F	3	50 - 75	BD	75.4	50.3	62	47	55	18	84	96
PG 2250 F	3	50 - 90	BD	90.4	50.3	67	67	60	23	105	117
PG 2241 F	3	63 - 90	BD	90.4	63.3	67	51	60	23	111	117
PG 2251 F	3	75 - 90	BD	90.4	75.35	67	55	60	23	117	117
PG 2242 F	3.2	63 - 110	BD	110.45	63.3	75	51	68	12	120	126
PG 2247 F	3.2	75 - 110	BD	110.45	75.4	75	55	68	12	120	126
PG 2243 F	3.2	90 - 110	BD	110.45	90.4	75	60	68	32	132	145

Code No .	Thickness (mm)	Nominal Outside Diameter (mm)	Application Area Code	Ds	ds	L1	L2	L3	Z1	Z2	Z3
PG 2248 F	3.2	90 - 125	BD	125.5	90.4	82	60	72	39	136	153
PG 2244 F	3.2	110 - 125	BD	125.5	110.45	82	68	72	20	156	154

PG