


Push-Fit 45° Uneq . junction (TS) Orange

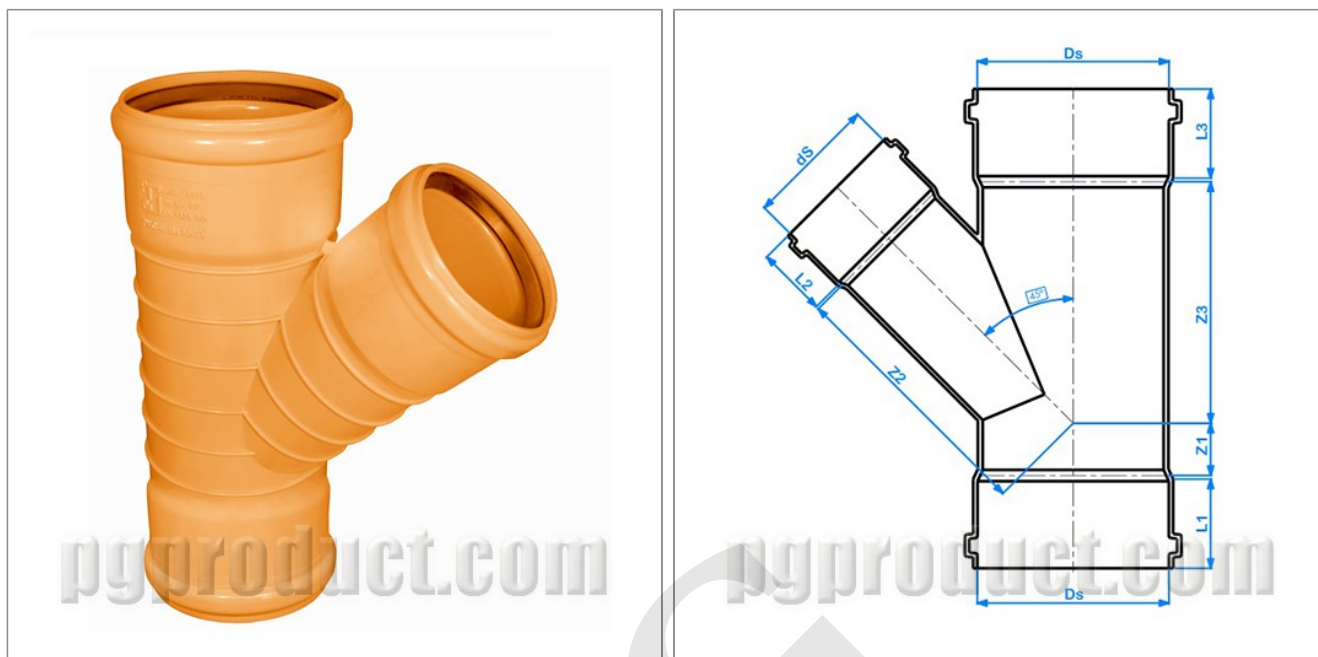

Standard :EN 1401-1

Code No .	Thickness (mm)	Nominal Outside Diameter (mm)	Application Area Code	Ds	ds	L1	L2	L3	Z1	Z2	Z3
PG 2362 F	3.2	63 - 110	UD	110.45	63.3	75	51	68	12	120	126
PG 2367 F	3.2	75 - 110	UD	110.45	75.4	75	55	68	12	120	126
PG 2363 F	3.2	90 - 110	UD	110.45	90.4	75	60	68	32	132	145
PG 2368 F	3.2	90 - 125	UD	125.5	90.4	82	60	72	39	136	153
PG 2364 F	3.2	110 - 125	UD	125.5	110.45	82	68	72	20	156	154