


Push-Fit 45° Y (DS) Grey

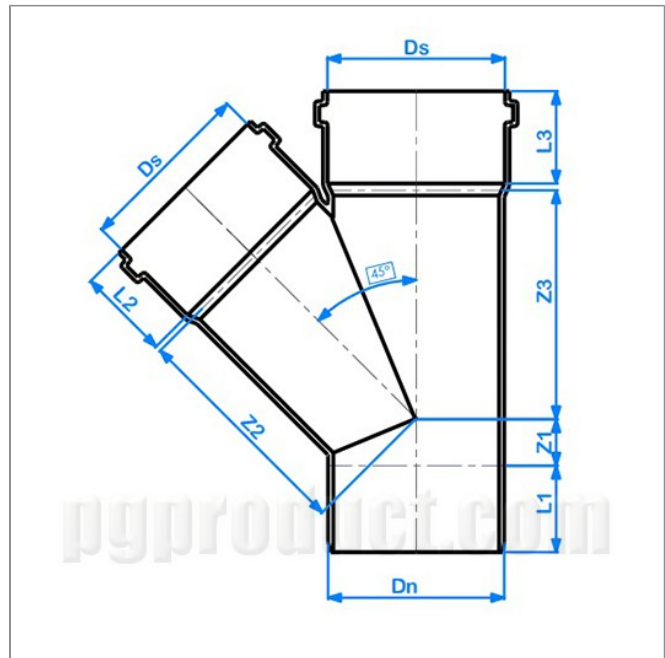

Standard :EN 1329-1

Code No .	Thickness (mm)	Nominal Outside Diameter (mm)	Application Area Code	Dn	Ds	L1	L2	L3	Z1	Z2	Z3
PG 1301 F	3	40	B	40	40.3	52	45	45	15	49	49
PG 1302 F	3	50	B	50	50.3	54	47	47	18	63	62
PG 1303 F	3	63	B	63	63.3	58	51	51	20	85	85
PG 1304 F	3	75	BD	75	75.4	62	55	55	18	96	96
PG 1305 F	3	90	BD	90	90.4	67	60	60	23	117	117
PG 1306 F	3.2	110	BD	110	110.45	75	68	68	32	145	145
PG 1307 F	3.2	125	BD	125	125.5	82	72	72	27	164	164

Code No .	Thickness (mm)	Nominal Outside Diameter (mm)	Application Area Code	Dn	Ds	L1	L2	L3	Z1	Z2	Z3
PG 71308 F	4	160	BD	160	160.6	98	84	84	41	207.5	207.5
PG 1309 F	4.9	200	BD	200	200.8	128	110.5	110.5	63	262	262

PG