


Push-Fit 87.5° Uneq . junction (DS) Grey

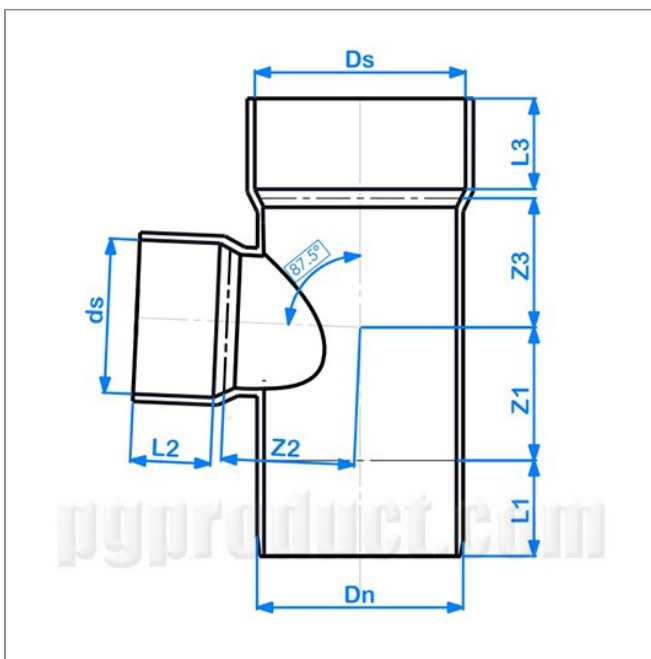

Standard :EN 1329-1

Code No .	Thickness (mm)	Nominal Outside Diameter (mm)	Application Area Code	Dn	Ds	ds	L1	L2	L3	Z1	Z2	Z3
PG 2312 F	3	40 - 63	BD	63	63.3	40.3	58	45	51	37	42	42
PG 2313 F	3	50 - 63	BD	63	63.3	50.3	58	47	51	37	42	42
PG 2309 F	3	50 - 75	BD	75	75.4	50.3	62	47	55	41	45	45
PG 2310 F	3	50 - 90	BD	90	90.4	50.3	67	47	60	50	60	57
PG 2301 F	3	63 - 90	BD	90	90.4	63.3	67	51	60	50	62	57
PG 2311 F	3	75 - 90	BD	90	90.4	75.35	67	55	60	50	65	57
PG 2302 F	3.2	63 - 110	BD	110	110.45	63.3	75	51	68	43	73	53

Code No .	Thickness (mm)	Nominal Outside Diameter (mm)	Application Area Code	Dn	Ds	ds	L1	L2	L3	Z1	Z2	Z3
PG 2303 F	3.2	75 - 110	BD	110	110.45	75.4	75	55	68	51	72	53
PG 2304 F	3.2	90 - 110	BD	110	110.45	90.4	75	60	68	60	75	74
PG 2305 F	3.2	63 - 125	BD	125	125.5	63.3	82	51	72	72	78	73
PG 2306 F	3.2	75 - 125	BD	125	125.5	75.35	82	55	72	72	78	73
PG 2307 F	3.2	90 - 125	BD	125	125.5	90.4	82	60	72	72	78	73
PG 2308 F	3.2	110 - 125	BD	125	125.5	110.45	82	68	72	72	78	73