


Push-Fit 87.5° Uneq . junction (DS) Orange

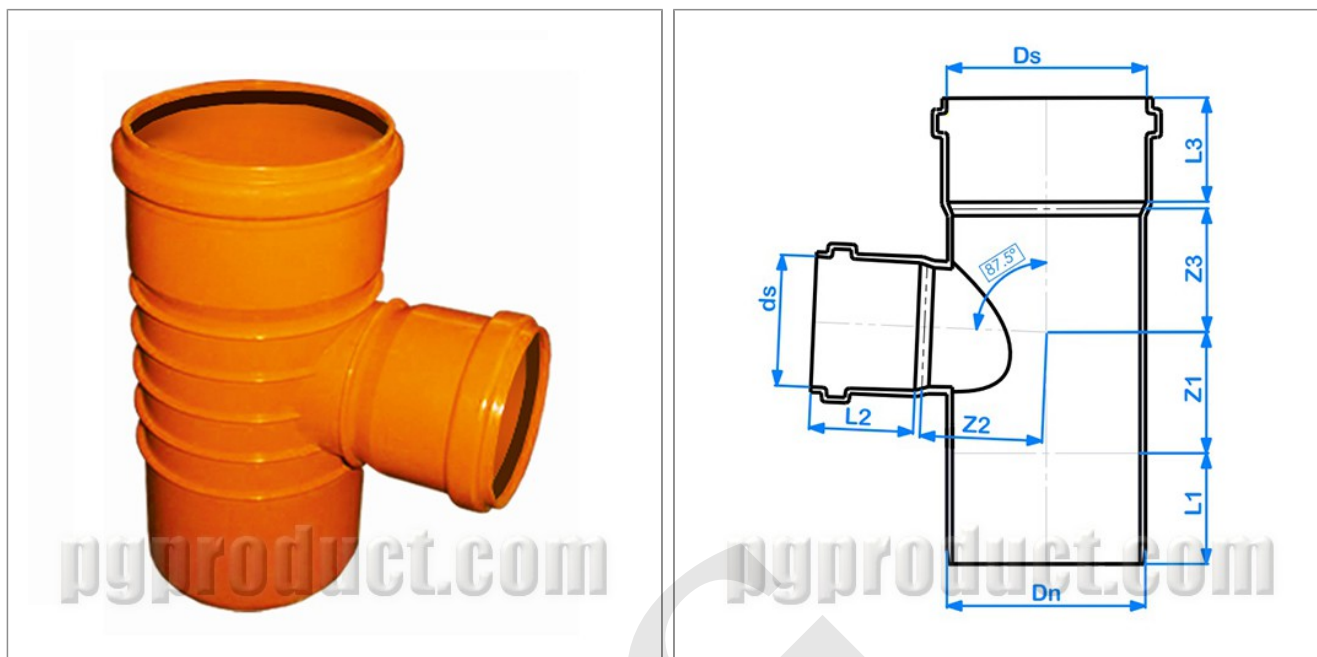

Standard :EN 1401-1

Code No .	Thickness (mm)	Nominal Outside Diameter (mm)	Application Area Code	Dn	Ds	ds	L1	L2	L3	Z1	Z2	Z3
PG 2422 F	3.2	63 - 110	UD	110	110.45	63.3	75	51	68	43	73	53
PG 2423 F	3.2	75 - 110	UD	110	110.45	75.4	75	55	68	51	72	53
PG 2424 F	3.2	90 - 110	UD	110	110.45	90.4	75	60	68	60	75	74
PG 2425 F	3.2	63 - 125	UD	125	125.5	63.3	82	51	72	72	78	73
PG 2426 F	3.2	75 - 125	UD	125	125.5	75.35	82	55	72	72	78	73
PG 2427 F	3.2	90 - 125	UD	125	125.5	90.4	82	60	72	72	78	73
PG 2428 F	3.2	110 - 125	UD	125	125.5	110.45	82	68	72	72	78	73